

Publication number: GB2278973

Publication date: 1994-12-14

Inventor: CAWLEY ROBIN ALEXANDER; STAPLETON ALAN LEWIS; BROWN IAN MICHAEL

Applicant: QUANTEL LTD (GB)

Classification:

- international: G06T9/00; H03M7/28; H04N5/907; H04N5/92; H04N7/26; H04N7/30; H04N7/32; G06T9/00; H03M7/28; H04N5/907; H04N5/92; H04N7/26; H04N7/30; H04N7/32; (IPC1-7): H04N7/13

- european: H04N7/32B; H04N5/907; H04N7/26A10T; H04N7/30; H04N7/30E5L

Application number: GB19930012039 19930611

Priority number(s): GB19930012039 19930611

Also published as:


EP0629090 (A2)
US5479210 (A1)
JP7170489 (A)
EP0629090 (A3)

Report a data error here

Abstract not available for GB2278973

Abstract of corresponding document: **EP0629090**

A video image processing system comprises an input cache store (3) for temporarily storing input video data, compressors (13, 15) for compressing image data from the input store and an output store (17) comprising multiple storage areas (19) of known fixed size for storing respective files of compressed data from the compressors (13, 15). The compressors are arranged to compress each image of the input video data to a given initial degree to produce respective data files. A processor (16) compares the number of bytes in each data file with the known size of one storage area (19) in the output store (17) to determine whether the data file will occupy a predetermined proportion of said storage area. In the event that the data file will not occupy said predetermined portion of said storage area, the processor causes one of the compressors to effect one or more repeat compressions to a different degree in order to produce a data file of a size which will occupy said predetermined proportion of said storage. The system thereby optimises the compression of data and the utilisation of storage in the storing of the compressed data.

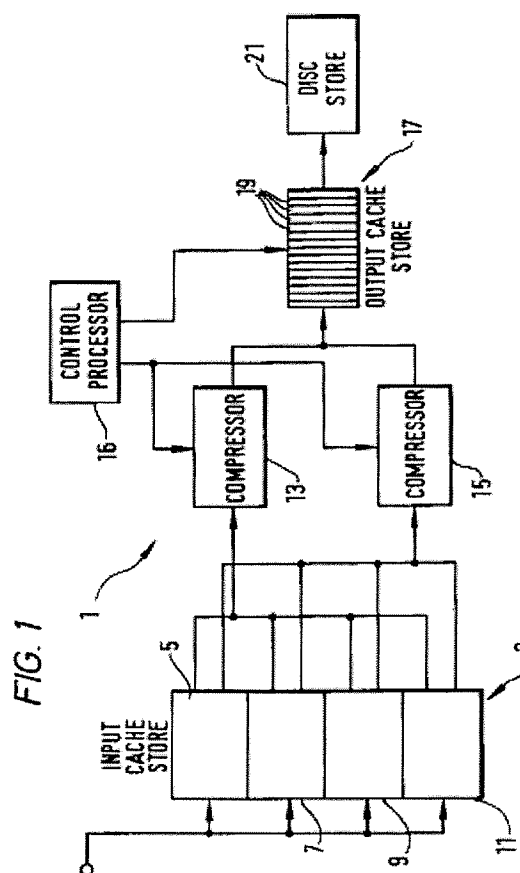

Data supplied from the esp@cenet database - Worldwide

(12) UK Patent Application (19) GB (11) 2 278 973 (13) A

(43) Date of A Publication 14.12.1994

(21) Application No 9312039.2

(22) Date of Filing 11.06.1993

(71) Applicant(s)

Quantel Limited

(Incorporated in the United Kingdom)

**Pear Tree Lane, NEWBURY, Berks, RG13 2LT,
United Kingdom**

(72) Inventor(s)

**Robin Alexander Cawley
Alan Lewis Stapleton
Ian Michael Brown**

(74) Agent and/or Address for Service

**R G C Jenkins & Co
26 Caxton Street, LONDON, SW1H 0RJ,
United Kingdom**

(51) INT CL⁵

H04N 7/13

(52) UK CL (Edition M)

H4F FD12M FD12X FD3 FD30K FRM

(56) Documents Cited

EP 0493130 A2 EP 0378316 A1 EP 0284161 A2

(58) Field of Search

UK CL (Edition L) H4F FRM FRW FRX


INT CL⁵ H04N 1/41 5/91 5/92 7/13

Online databases: WPI

(54) Compressing video images to a predetermined size

(57) An input cache store 3 for temporarily storing input video data is connected to compressors 13, 15 for compressing image data from the input store and an output store 17 comprising multiple storage areas 19 of known fixed size for storing respective files of compressed data from the compressors 13, 15. The compressors compress each image of the input video data to a given initial degree to produce respective data files. A processor 16 compares the number of bytes in each data file with the known size of one storage area 19 to determine whether the data file will occupy a predetermined proportion of the storage area. If the data file will not occupy said predetermined portion of the storage area, the processor causes one of the compressors to effect one or more repeat compressions to a different degree in order to produce a data file of a size which will occupy said predetermined proportion of the storage. The system thereby optimises the compression of video data.

FIG. 1

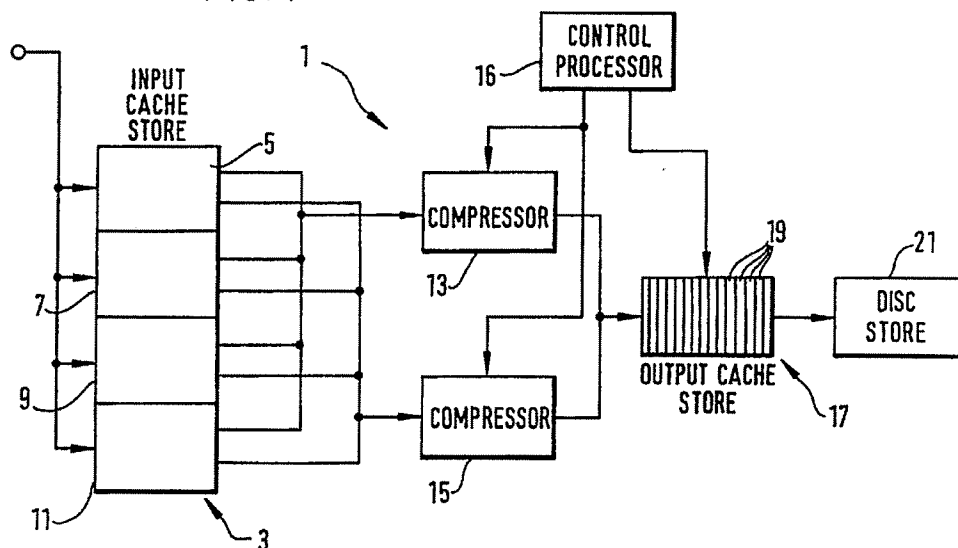


At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

This print takes account of replacement documents submitted after the date of filing to enable the application to comply with the formal requirements of the Patents Rules 1990.

GB 2 278 973 A

FIG. 1

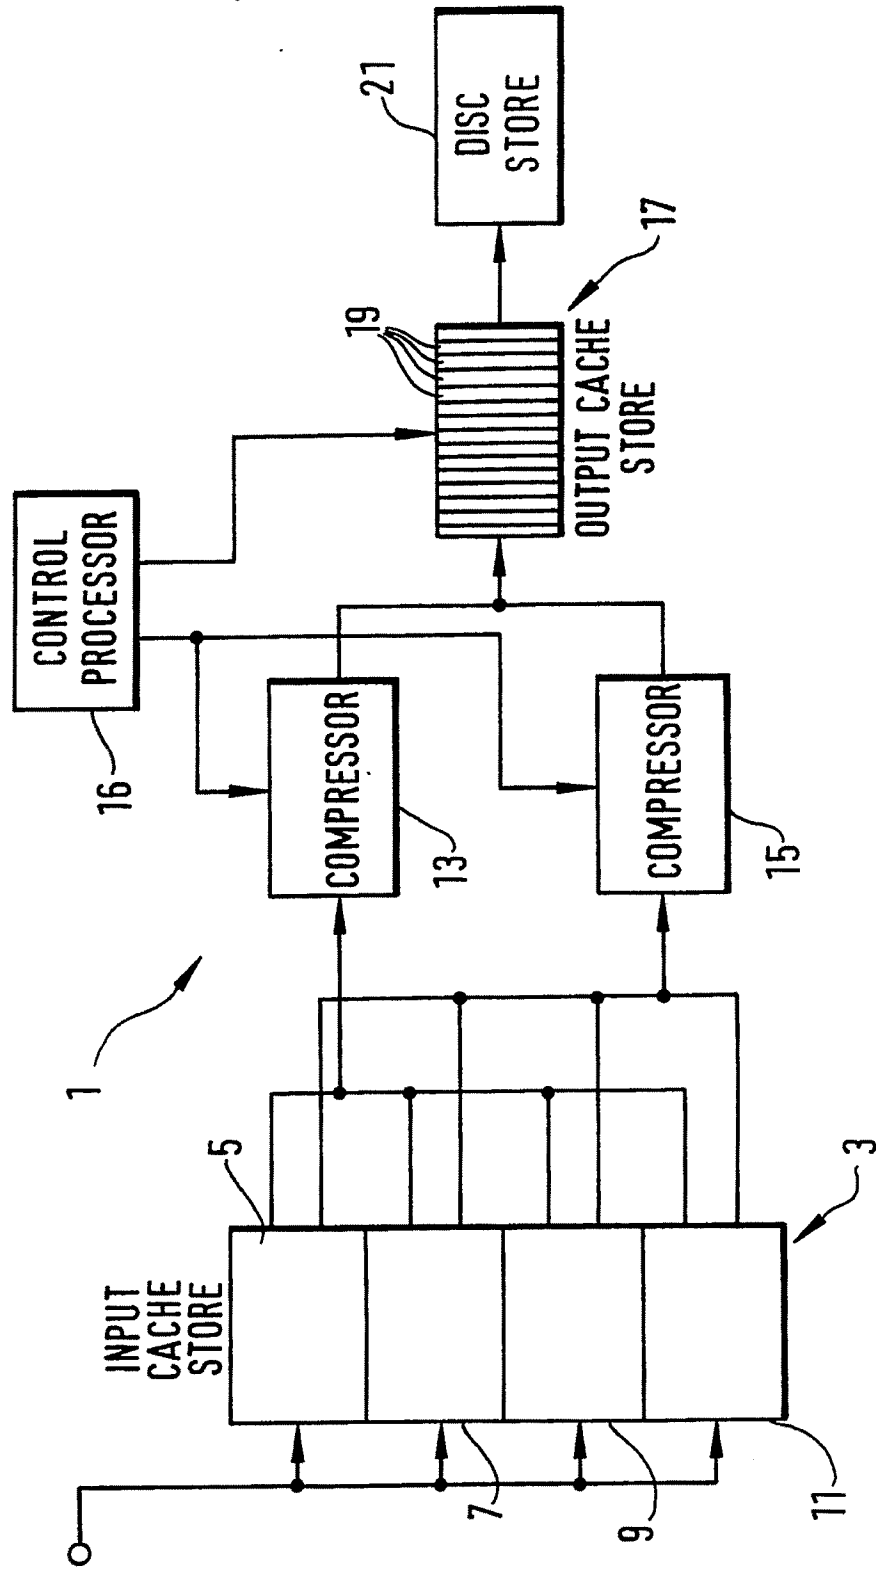

VIDEO IMAGE PROCESSING SYSTEMS

This invention relates to video image processing systems.

It is desirable that such systems in which there
5 is storage of image sequences should be operated with
a fixed file size, that is to say, with a store in
which equal capacity is allocated for storage of each
image of the sequence. Where the stored images are
uncompressed, as is normally the case in on-line
10 systems, such a store is the natural form to be
adopted. However, the use of this type of store in
systems, such as off-line systems, where the stored
images are compressed, presents difficulties.

Because the compression achieved in an image
15 employing a given compression factor is substantially
less for a complex image than it is for a simple
image, the compressed complex image contains more data
than the compressed simple image.

Further, for a given image, the greater the
20 applied compression factor, the more compressed is the
resultant image and the smaller therefore is the
required file size so that for a particular compression
factor, if the image is a simple image it will
require a smaller storage capacity than would be the
25 case if the image were a complex image. Accordingly,
for a sequence of images for example of moving video
a range of different file sizes would be called for to

store the sequence.

5 The use of a store having different file sizes is
an unattractive option because a uniform file size
store considerably simplifies the filing structure of
a machine where the permanent store is a disc store
for which random access is provided and which can
record to and delete from the store individual images
of video. The use of a fixed file store also
maintains the family similarity with machines in which
10 the stored images are not compressed.

15 If a variable file size for image storage is
ruled out, the obvious course is to use a sufficiently
high compression factor so that almost any image,
notwithstanding its complexity will compress into the
requisite file size. However, this inevitably means
that a higher compression factor than necessary will
be used on most images resulting in a lower than
necessary image replay quality.

20 This implies the need to employ a variable
compression factor to achieve equalisation of the data
content for each of the compressed images of the
sequence being stored.

25 It is an object of the present invention,
therefore, to afford an improved video image
processing system in which images of an input image
sequence are stored after compression.

The present invention consists in a video image
processing system comprising a video image input means

for the supply in digital data form of a sequence of video images, video image storage means adapted to store in sequence the images supplied from said input means, data compression means for compressing in
5 sequence the data of the images supplied to the storage means at a speed faster than the speed of the supply of images to the storage means, variable control means for varying the degree of compression effected by the compression means, further storage
10 means for storing images operated on by the compression means and having the same sized storage capacity allocated for storage of each image supplied thereto from the compression means, and processor means for determining if the data of each image
15 supplied to the further storage means occupies a predetermined proportion of the capacity thereof allocated for each image and for activating the control means to adjust the degree of compression effected by the compression means to a value employed
20 in a repeat compression of the image which enables storage thereof in said predetermined proportion of the capacity allocated to that image in the further storage means.

Advantageously, the compression means are adapted
25 to apply to the images of the sequence supplied thereto an initial degree of compression equal to that applied to the previous image which compressed that image to enable storage thereof in the further storage

means.

Preferably, the processor means are adapted to enable the compression means to effect a plurality of repeat compressions at respective different degrees of compression of the data of each image until the image
5 is compressed to an extent which enables storage thereof in the predetermined proportion of the capacity allocated to it of the further storage means.

Suitably, the compression means are adapted to
10 operate at a speed higher than that of real time operation to enable one or more repeat compressions of each image whilst maintaining real time operation.

Advantageously, the compression means comprise respective uncompressed and compressed cache stores to
15 allow one or more repeat compressions of each image whilst maintaining real time operation.

In one form of the invention, the compression means comprise first and second compression means which cooperate to enable at least one repeat
20 compression prior to storage in said further storage means of each image whilst real time operation is maintained.

According to a preferred feature of the invention, the processor means determines the degree
25 of compression required for repeat compression of an image by means of a predictive algorithm.

Preferably, said algorithm is a function of the degree of compression of the image applied to the

image in the compression preceding the repeat, the quantum of occupancy of the capacity of the further storage means allocated to the image compressed in the compression preceding the repeat and the desired occupancy by the image of said allocated capacity of the further storage means.

Suitably, the predictive algorithm is given

$$\text{by } Q' = Q \left(\frac{\text{storage needed}}{\text{storage wanted}} \right)^\alpha$$

10 where Q = the compression required for a repeat compression of the image,
 Q = the compression of the image preceding the repeat compression,
 α = is an empirically determined
 15 constant,

the "storage needed" is the storage capacity of the further storage means which would be required to store the image as compressed by the compression preceding the repeat, and
 20 the "storage wanted" is the proportion of the storage capacity allocated in the further storage means for each image which it is desired to fill by the compressed image.

25 The invention will now be described, by way of example with reference to the accompanying drawing which illustrates elements of a video processing system in which storage of a sequence of compressed video images takes place.

Referring to the drawing, in a video processing system 1 a sequence of fields of video, suitably, moving video, in which each field comprises digital data, is supplied to a cache storage means 3 in which the fields are stored in separate field store areas 5, 7, 9, 11 the number of which depends on the number of repeat compression of each field that the system is required to provide for. Pairs of successive fields comprise respective frames of the video sequence. The video input can randomly access the field store areas.

Two compressors 13 and 15 are provided each of which can randomly access each field store area and effect compression of an accessed field at a speed greater than that at which the fields are supplied to the storage means 3.

The compressed fields from the compressors are supplied under the control of a processor 16 to a compressed cache store 17 having file stores 19 for storing respective compressed fields, the file stores being of equal capacity. The store 17 under the control of the processor 16 supplies images contained in the file stores 19 to a disk store 21 or other form of permanent storage, for example; a video tape recorder.

The initial compression factor applied to each of the fields of the sequence is equal to that which was employed with the preceding field to achieve the compression thereof at which it was loaded into its

file 19.

The processor 16 whilst a file 19 is being loaded with a compressed field from one or other of the compressors counts the number of bytes of data of the field concerned and if that number is above or below predetermined limits, the processor will instruct the relevant compressor 13 or 15 to alter the degree of compression effected thereby according to a predictive algorithm, one suitable algorithm being as follows:

$$10 \quad Q' = Q \left(\frac{\text{storage needed}}{\text{storage wanted}} \right)^\alpha$$

where Q' = the compression required for a repeat compression of the image,

Q = the compression of the image

15 preceding the repeat compression,

α = is an empirically determined constant a suitable value of which being 1.33,

the "storage needed" is the storage capacity of the file store 19 being loaded needed to store the image as compressed by the compression preceding the repeat, and the "storage wanted" is a predetermined proportion of the capacity of the file store 19 being loaded which it is desired to fill by the compressed image.

Accordingly, the repeat compression, if required, is carried out under a degree of compression calculated from the value of the compression preceding

the repeat multiplied by a factor which comprises a ratio of the number of bytes counted by the processor divided by the number of bytes equivalent to a predetermined proportion of the capacity of the file which it is desired to fill, such ratio being raised to the power of an empirically determined constant.

In some circumstances for example where the compressed field occurs at a cut, more than one repeat compression of one or more of the fields of the sequence may be needed to achieve satisfactory utilisation of the file size into which the field is being loaded. In such circumstances value of Q for the second or subsequent compression is the degree of compression applied to the field in the compression preceding the second or subsequent repeat.

If the retry limit of the system is reached, a default value of Q is employed which guarantees that the compressed image will fit into the predetermined proportion of the file allocated for the purpose.

It will be apparent that a single compressor rather than the two illustrated may be employed. However, the need to repeat compressions loses time and may cause the compression hardware to fail to keep up with the speed of supply, which may be in real time, of fields to the field store areas of cache store 3. The provision of large cache stores 3 and 17 helps but when a single compressor is employed, the system will only cope with occasional repeats. The

employment of two compressors allows a second repeat compression for every field though, because of the success of the predictive algorithm, this does not actually often happen. The system illustrated allows
5 easily for occasional multiple repeat compressions.

The manner of operation of the two compressors is as follows; as the loading of first field of the first frame of the sequence into field store area 5 is completed, loading of the second field commences into
10 area 7 during which compression of the first field by compressor 13 commences at a speed which is somewhat higher than that of the supply of fields of the sequence to the store 3. If the degree of compression imparted to the first field is such that the number of
15 bytes of the compressed image is between the predetermined limits, i.e. those which will give satisfactory occupation of the file being filled, the compression of the second field takes place by compressor 12 whilst loading into area 9 of storage
20 means 3 of the third field takes place. By virtue of its speed being greater than that of the supply of fields to storage means 3, compressor 13 is available, so long as no repeat compressions are needed, to handle the field compressions required. Suppose,
25 however, each field needs a repeat compression before its data content can satisfactorily occupy the file of store 17 allocated to it, what happens is that the first field is supplied to store area 5 and

compression thereof is effected by compressor 13 whilst the second field is loaded into store area 7. As the speed of the compressors exceeds that of the supply of fields to the store 3, the repeat
5 compression of the first field can be handled by compressor 13 whilst the first compression of the second field is handled by compressor 15 whilst the third field is loaded into area 9 of store 3. The repeat compression of field 2 is handled by compressor
10 15 whilst the first compression of field 3 is effected by compressor 13 which is available since the repeat compression of the first field was accepted by store 17. Accordingly, the fields supplied to the store 3 are effectively in a queue and the compressions and
15 repeat compressions of the fields are handled by the compressor which is available at the time a compression or repeat compression is required to be effected.

It will be appreciated that the system operates
20 so that the amount of image data loaded into each file of the store tends to be equalised with the result that the average quality of replay is improved compared with the case where the compression factor applied is fixed and chosen to accommodate the most
25 complex image and has the appearance of uniformity.

During replay the image decompressor must be set up to match the compression factor which was used to compress the image file it is about to decompress.

Accordingly, this can be achieved by this compression factor in a header attached to the front of each compressed file on the disc store 21.

CLAIMS:

1. A video image processing system comprising:

video image input means for the supply in digital data form of a sequence of video images;

5 video image storage means adapted to store in sequence the images supplied from said input means;

data compression means for compressing in sequence the data of the images supplied to the storage means at a speed faster than the speed of the supply of images to
10 the storage means;

variable control means for varying the degree of compression effected by the compression means;

further storage means for storing images operated on by the compression means and having the same sized
15 storage capacity allocated for storage of each image supplied thereto from the compression means; and

processor means for determining if the data of each image supplied to the further storage means occupies a predetermined proportion of the capacity thereof
20 allocated for each image and for activating the control means to adjust the degree of compression effected by the compression means to a value employed in a repeat compression of the image which enables storage thereof in said predetermined proportion of the capacity
25 allocated to that image in the further storage means.

2. A video image processing system claimed in claim 1, characterised in that the compression means are adapted

to apply to the images of the sequence supplied thereto an initial degree of compression equal to that applied to the previous image which compressed that image to enable storage thereof in the further storage means.

5 3. A video image storage means as claimed in claim 1
or claim 2, characterised in that the processor means
are adapted to enable the compression means to effect a
plurality of repeat compressions at respective different
degrees of compression of the data of each image until
10 the image is compressed to an extent which enables
storage thereof in the predetermined proportion of the
capacity allocated to it of the further storage means.

4. A video image processing system as claimed in claim
3, characterised in that said compression means are
15 adapted to operate at a speed higher than that of real
time operation to enable one or more repeat compressions
of each image whilst maintaining real time operation.

5. A video image processing system as claimed in claim
4, characterised in that said storage and further
20 storage means comprise respective uncompressed and
compressed cache stores to allow one or more repeat
compressions of each image whilst maintaining real time
operation.

6. A video image processing system as claimed in any

preceding claim, characterised in that said compression means comprise first and second compression means which cooperate to enable at least one repeat compression prior to storage in said further storage means of each
5 image whilst real time operation is maintained.

7. A video image processing system as claimed in any preceding claim, characterised in that the processor means determines the degree of compression required for repeat compression of an image by means of a predictive
10 algorithm.

8. A video image processing system as claimed in claim 7 characterised in that said algorithm is a function of the degree of compression of the image applied to the image in the compression preceding the repeat, the
15 quantum of occupancy of the capacity of the further storage means allocated to the image compressed in the compression preceding the repeat and the desired occupancy by the image of said allocated capacity of the further storage means.

20 9. A video image processing system as claimed in claim 7 or claim 8, characterised in that the predictive algorithm is given

by
$$Q' = Q \left(\frac{\text{storage needed}}{\text{storage wanted}} \right)^{\alpha}$$

25 where Q = the compression required for a repeat compression of the image,

Q = the compression of the image preceding
the repeat compression,
 α = is an empirically determined constant,
the "storage needed" is the storage capacity
5 of the further storage means which would be
required to store the image as compressed by
the compression preceding the repeat, and
the "storage wanted" is the proportion of the
storage capacity allocated in the further
10 storage means for each image which it is
desired to fill by the compressed image.

10. A video image processing system as claimed in any
preceding claim, characterised in that the sequences of
images stored in the storage means and compressed by the
15 compression means comprise successive fields of video
frames.

11. A video processing system as claimed in any
preceding claim, characterised in that the image
sequence supplied to the video storage means comprises
20 moving video.

12. A video image processing system in which video data
representing a sequence of video images is processed for
storage in a compressed form, the system being arranged
to compress the data for incoming video images, to
25 examine the compressed data for each image in order to

determine whether compression is optimal and to recompress the data for an image using different compression parameters where the compression is found not to be optimal.

Patents Act 1977
Examiner's report to the Comptroller under
Section 17 (The Search Report)

Application number

GB 9312039.2

Relevant Technical fields

(i) UK CI (Edition L) H4F (FRM, FRW, FRX)

(ii) Int CI (Edition 5) H04N (1/41, 5/91, 5/92, 7/13)

Databases (see over)

(i) UK Patent Office

(ii) ONLINE DATABASE: WPI

Search Examiner

M K REES

Date of Search

24 AUGUST 1993

Documents considered relevant following a search in respect of claims 1 TO 12

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	EP 0493130 A2 (CANON KK) - see Figure 1; page 5, line 18 to page 7, line 31	1, 7, 12
X	EP 0378316 A1 (CROSFIELD ELECT.) - see abstract	1, 12
A	EP 0284161 A2 (PHILIPS) - see abstract	1, 12

Category	Identity of document and relevant passages - 18 -	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).